

BT-210F



PC, TV, DVD

AUX

USB, SD/MMC

MP3

//FEATURES

- 2500W PMPO
- Analog audio input.
- MP3 playback on USB or SD/MMC.
- Stereo FM radio.
- Built-in multi channel power amplifier.
- Connect via Analog to your PC, DVD, TV etc.
- Specially designed woofer cabinet for bass and resolution
- Remote Control

//SPECS

Output Power: 35W+15Wx2(RMS)
 Frequency response:
 Satellites: 120Hz-20KHz
 Subwoofer: 20Hz-170Hz
 Distortion: < 0.5% (1K, 1W)
 S/N: >70dB
 Power Supply: ~120V 60Hz

QUICK START GUIDE

A

BLUETOOTH SETUP


1. SELECT BLUETOOTH MODE USING THE "INPUT" BUTTON ON THE UNIT (5) OR ON THE REMOTE (11).
2. YOU WILL SEE "BT" FLASHING ON THE DISPLAY.
3. SEARCH FOR DEVICES FROM YOUR PHONE/TABLET/PC/LAPTOP
4. LOOK FOR "BLUETOOTH SPEAKER" IN YOUR SEARCHED DEVICES.
5. CONNECT AND PAIR. VOILA!

B


FM TUNER SETUP

1. GO TO FM MODE WITH "INPUT/SOURCE" BUTTON AND TUNE TO DESIRED STATION.
2. PRESS "MEMORY" BUTTON AND "CHx" WILL BLINK. CLICK NEXT OR PREVIOUS TO SELECT DESIRED CHANNEL.
3. CLICK "PLAY/PAUSE" TO SAVE CHANNEL.

NOTE: TO SCAN, HOLD DOWN "MEMORY" BUTTON

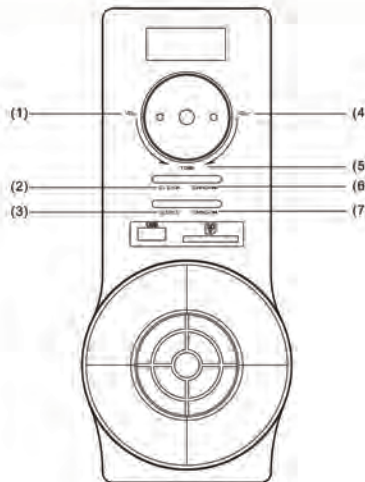

1. Volume adjustment +/-
2. Play/Pause/Stand-by
3. Input/Source
4. Volume adjustment +/-
5. Tone: adjust bass/treble
6. Tuning+/Next>>
7. Tuning-/Previous<<

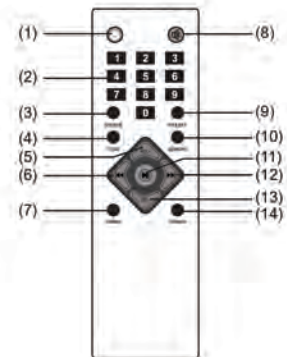

1. STANDBY: turn unit on or off
2. 0-9
3. Source/Input
4. INPUT: cycle selection between input USB/SD/FM/AUX/BT.
5. VOLUME+
6. PREV: skip to the previous track
7. TUNING+
8. MUTE
9. PRESET
10. MEMORY
11. PLAY/PAUSE: begin play or pause the USB or SD/MMC. Hold down to scan radio stations.
12. NEXT
12. VOLUME-
14. TUNING+